

Trade Name: ASTRO ACOUSTIC VENT SLEEVE

Fire Rated Vent Sleeve

A fire rated Vent Sleeve for ventilation ducts.

Restores and maintains integrity of 30 & 60 minute fire rated ceilings.


Provides an effective acoustic barrier between fan / vent and ceiling.

Easy to retro fit into existing fans / vents.

Lightweight and can be fitted from above or below the ceiling.

Invisible once fan / vent is fitted.

Various sizes available.

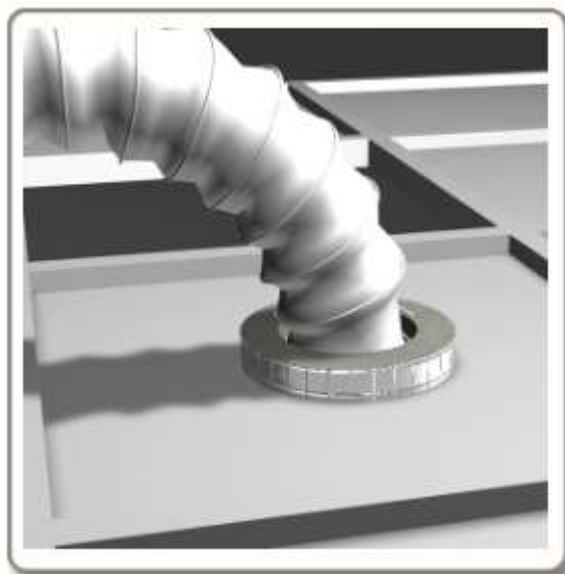

Description

Recessed ceiling fans and ventilation ducts are widely used in both domestic and commercial buildings and the use of forced / controlled ventilation is increasing because it can be more energy efficient than traditional ventilation methods.

Centralised ventilation units and heat recovery units result in a building having both horizontal and vertical penetration holes through the structure, creating pathways for the passage of fire and smoke. Once a hole is made in the ceiling for a polymeric fan or vent, the integrity of the construction and its ability to perform in a fire is reduced significantly.

Ceilings subject to fire regulations must be fire protected in accordance with Approved Document B of the Building Regulations. Any vent opening must be fire stopped to reinstate the original fire rating of the ceiling.

Unlike down lights, which are generally all fire protected, fans and vents are often left unprotected.

A 100mm diameter fan or vent has several times the open area of a down light and lacks a metal "can" to slow the spread of fire. This, coupled with the ability of the fire to move all around the building via the ventilation system, makes it ever more important to fire protect ceiling mounted fans and vents.

Availability

Item	Diameter	Product Ref	Cut out Required
Acoustic vent sleeve	80	AFAVS80	110mm
Acoustic vent sleeve	100	AFAVS100	127mm
Acoustic vent sleeve	125	AFAVS125	167mm

Acoustic vent sleeve

150

AFAVS150

202mm

Available in singles or boxes of 10

Packing

All sizes - 10 per pack

To Order & Specify

Please quote : QTY / TRADENAME / PRODUCT REF / SIZE

Typical wording 10 / ASTRO ACOUSTIC VENT SLEEVE AFAVS100

Fire Test or Assessment Reports

Tested to the principles of BS 476 part 20

30 Minute Plasterboard / Timber Ceiling

Duration of effective protection - 36 minutes

60 Minute Plasterboard / Timber Ceiling

Duration of effective protection - 72 minutes

Health and Safety

See COSHH Sheet.

Installation

Please refer to our install sheet

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)