

Trade Name: Finger Keeper Industrial - TPV Heavy Duty Hinge Guard

COSHH Data

Installation Data

Product Images

Installation Video

Finger guard designed for interior or exterior doors in demanding commercial, industrial, retail or similar environments.

For use with timber or steel hinged or pivoting doors with opening angles up to 120°. Minimum 35mm door thickness required.

Lengths: 2100mm and 2500mm.
Widths: Standard 157mm / Wide 257mm.
Anodised aluminium carriers with fixing concealment strips.


TPV safety strip for good environmental temperature performance and resistance to chemicals and weathering.

Can be retro fitted.

Easily extended for non standard height doors.



Description

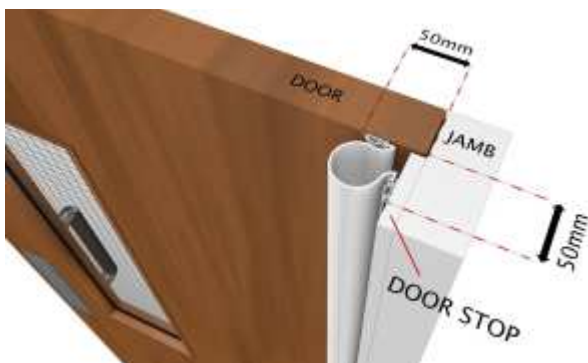

the hinged side.

Fingerkeeper Industrial TPV is a heavy duty safety strip that protects against finger-trapping accidents in doors.


Manufactured from extruded **TPV** slotted into an anodised aluminium carrier it is a versatile product suited to many finger guard applications indoors and out.

The guard is available in various configurations and colours.

The TPV safety strip prevents fingers being pinched on the hinge side of a door. It is fixed to the door and the jamb on

Where automatic swing doors are fitted, it is a requirement of BS EN 16005 that fingertrap protection be used at the hanging stile(s) of the doorset.

The dimensions of the standard finger guard are shown below in mm.

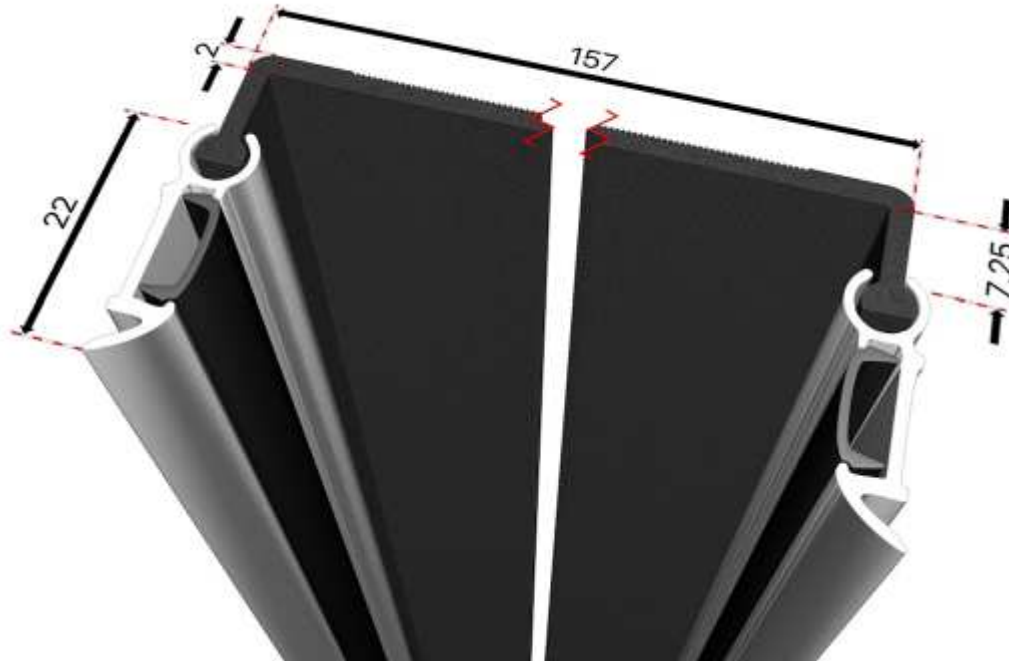

A wider safety strip is available for covering larger gap openings, such as powered gates etc. The safety strip is 257mm wide compared to the standard width of 157mm (above).

Size and Colour Options

Seal Lengths

Guards are available in Black, Brown or White in 2100mm lengths or (Black only) 2500mm lengths. They can be cut to length required.

Standard Finishes

Carrier: Satin Clear Anodised Aluminium
Strip: Black, Brown or White TPV Polymer.

Fixing Method

Self drilling screws concealed by push-in, guard colour matched cover strips (all parts supplied).

Availability

Finger Guard Colours / Versions	Materials	Width	Length	Code
Finger Keeper Industrial TPV Standard	Aluminium Carrier Black TPV Guard	157mm	2100 mm	AFFKINDTPV
Finger Keeper Industrial TPV Standard	Aluminium Carrier Brown TPV Guard	157mm	2100 mm	AFFKINDTPVB
Finger Keeper Industrial TPV Standard	Aluminium Carrier White TPV Guard	157mm	2100 mm	AFFKINDTPVW
Finger Keeper Industrial TPV - Long Version (2500mm)	Aluminium Carrier Black TPV Guard	157mm	2500 mm	AFFKINDXTPV
Finger Keeper Industrial TPV Wide Version (257mm)	Aluminium Carrier Black TPV Guard	257mm	2100 mm	AFFKINDWBTPV

To Order & Specify

Please quote - Quantity / Trade Name / Product Ref. / Size

Typical example:-

10 / Astro Fingerkeeper Industrial TPV/ AFFKINDTPV / 2100

About TPV

TPV (ThermoPlastic Vulcanizate polymer) is based on EPDM rubber modified to have greater tear resistance at a lower density.

TPV has good environmental temperature performance - both low and high.
Good resistance to chemicals and weathering. Low compression set and flex fatigue resistance.

TPV is significantly more UV stable (no fading or whitening) and has greater tear strength and tear resistance compared to EPDM.

Health and Safety

Normal good industrial and personal hygiene practices should be observed.

Installation

Installation instructions supplied with product also can be requested from our sales team by email sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482 fax 0800 023 2483
(01329 844500) (01329 844600)

intl
tel +44 1329 844500 fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)