
Trade Name: Astro FS Block

Fire Stop Block

Tested to BS EN 1363-1:1999
for up to 2 hours

Compressible material for simpler installation

Only min. 10% compression required

Can be cut to any required length(s).

Red coating provides easy recognition


Easy to add and remove

Square edges are easy to stack

No overlapping required - lower cost

Can be installed from one side

150mm length can provide a clean wall solution

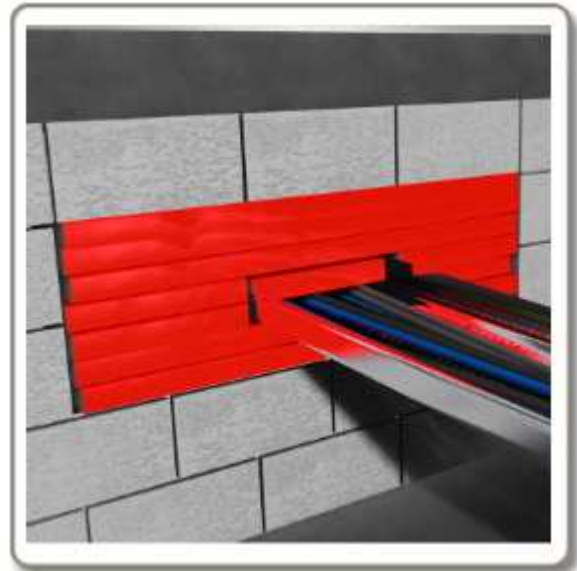

Description

Fire Stop Block is a unique, compressible and fully intumescent alternative to fire pillows.

FS Block can be supplied in up to 1 metre lengths and can be cut to size on site. This ensures maximum flexibility and minimum wastage..

The material can be installed within and around various electrical penetrations and provides up to 120 minutes fire rating.

Availability

Available in 1 metre lengths in any quantity.

Packing

As above.

To Order & Specify

Please quote - Quantity / Trade Name / Product Ref.

Typical example:-

10 / Astro FS Block/ AFFSBLOCK

Fire Test or Assessment Reports

Tested to BS EN 1363-1:1999 for up to 120 minutes

Test Report No: IF011059 Chiltern Int. Fire

EI120 on up to 100x100mm PVC Trunking

EI120 on up to 150x150mm Steel Trunking

E120 on Cable Basket and various Cable Types

For specific fire insulation ratings contact Astroflame

Health and Safety

Dust generated may cause irritation to skin or eyes. See COSHH datasheet for full details.

Keep out of reach of children. Normal good industrial and personal hygiene practices should be observed.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)