

Trade Name: ASTRO FLEXI-COAT SEAL Fire Resistant Flexible Coating

Up to 2 hours fire resistance.

Smoke, acoustic, air and water barrier.

Offers 50% joint flexibility between -10 to +95 °
C.

Fire Resistance EN 1366-4 EI120, EN 1366-4 EI
120

Fire Classification EN 13501-2

Acoustic Isolation EN 10140 to 52dB

Air Permeability EN 1026 to 600Pa

Water Permeability EN 1027 to 450Pa

Suitable for indoor use without additional
environmental protection.

Withstands high pressure water and air.


Dynamic movement testing 500 cycles per 30
minutes.

Can be spray, brush, pour or trowel applied.

Ideal for slab edge applications, head of wall and
movement installations.

Suitable for voids up to 500mm wide.

Ideal for spray, trowel, brush & pourable
application.

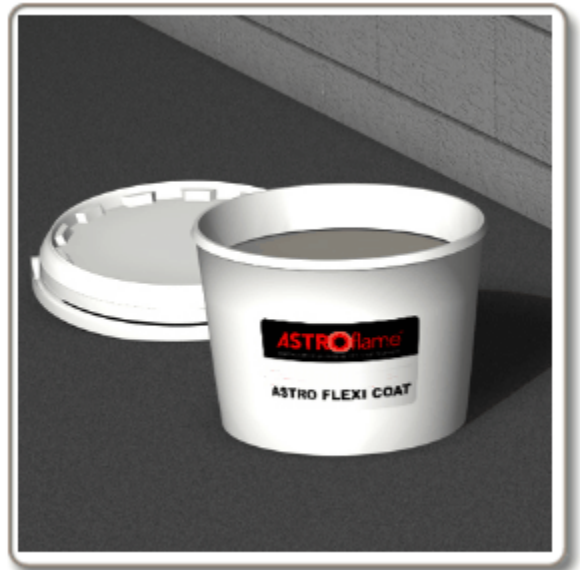

Certifire 3rd Party Accreditation

Description

Flexi-Coat has been developed for use on a stone wool or elastomeric base.

Flexi-Coat remains highly flexible to permit thermal and mechanical movement of services and the buildings structure.

Once the Flexi-Coat is applied it prevents the passage of fire, smoke and sound between fire rated compartments giving a fire resistance tested to BSEN 1366-3 120EI and BSEN 1366-4 120EI.

Flexi-Coat has also achieved 600Pa air permeability resistance testing to EN1026 and 450Pa water permeability resistance testing to EN 1027.

Tested with metallic pipes, cables, cable bunches, Cable Trays and Cable Ladders and causes no deleterious effects to plastic pipes, plastic cables, sheathing or metallic components.

 CE Marked Documents
'DoP's are Declarators of Performance
'CoC's are 'Certificates of Constancy'

Optimum solution for the sealing of the slab edge to the external cladding system - offering high movement capabilities.

Install on base of 80kg/m³ stone wool for flexible installations.

Can be installed in to voids / cavities up to 500mm wide. Flexi-Coat is a water based elastomeric acrylic coating, having excellent fire, water, air permeability and elastomeric properties offering up to 50% movement.

Ideal for spray, trowel, brush & pouring applications.

Halogen free. Unaffected by oil. Resists vermin and fungi. Contributes to Green Building.

Can be used in conjunction with our [FLEXI BOARD](#).



1121

Astroflame Fireseals Ltd
Unit 8 The I O Centre
Stephenson Road
Segensworth, Fareham
Hampshire, PO15 5RU
14
1121-CPR-JA5014

ETA-14/0048
ETAG 026 – Part 1
ETAG 026 – Part 3
ASTRO FLEXI COAT SEAL

“see ETA-14/0048 for relevant characteristics”

Description	Water based flexible acrylic coating
Colour	White
Density	1.25 – 1.3 g/cm ³
Cure Rate	0.5mm per day at 50% relative humidity 23°C
Tack Free	6hrs at 23°C, 50% RH
Application Temperature	+0°C to +30°C
Coating Thickness	2.5mm Nominal, wet coating thickness
Stopseal Sealant Coverage	2.8kg/m ² , 3.5L/m ²
Fire Resistance	EN 1366-4 EI 120
Insulation	EN 1366-4 120mins
Classification	EN 13501-2
Acoustic Isolation	EN 10140 43dB when installed with 100mm thick 80kg/m ³ stone wool. EN 10140 52dB when installed with 200mm thick 80kg/m ³ stone wool.
Air Permeability	600 Pa EN 1026 - 100Pa 0.4/1.5 m ³ /h/m ²
Water Permeability	450 Pa EN 1027 - No Leakage
Container Size	2.5kg, 5kg, 10kg, 25kg, 210kg.
Movement	500 cycles per 30 mins - 50% expansion and compression



Flexi-Coat compressed to >100mm and compressed to <80mm under 7 tonne load.

Flexi-Coat has undertaken dynamic movements tests in excess of 500 per 30 mins cycles extending to 150mm and compressing to 80mm. After 1000 cycles there was no visible or physical deterioration of the Flexi-Coat.

Availability

ASTRO FLEXI COAT: 7.4 Litre Pail

Colour White

For long term storage and ease of installation it is recommended that it should be stored indoors, in dry conditions. Storage temperature between -5°C and +25°C. Shelf life 12 months from date of manufacture.

To Order & Specify

ASTRO FLEXI-COAT SEAL

Please quote- Quantity / Trade name / Product ref
5 / Astro Flexi Coat Seal / AFBFLEXICOAT

Fire Test & Assessment Reports

Fire Resistance EN 1366-4 EI120, EN 1366-4 EI 120

Fire Classification EN 13501-2

Certifire 3rd Party Accreditation

Acoustic Isolation EN 10140 to 52dB

Air Permeability EN 1026 to 600Pa

Water Permeability EN 1027 to 450Pa

Dynamic movement testing 500 cycles per 30 minutes.

Health and Safety

Use rubber gloves and eye protection to avoid skin and eye contact.

Normal good industrial and personal hygiene practices should be observed.

Environmental Impact

Flexi-Coat Seal contributes to a Green Building :-

Low VOC (air quality).

No Power Tools required for installation (no energy source required).

Dust free.

Low Ozone Depletion Potential (ODP).

Low Global Warming Potential (GWP).

No water pollution.

Smoke and Air Tightness.

Water Tightness.

Noise Reduction.

Thermal Insulation.

Recycling of Packaging.

Avoidance of Air Filtration.

Contains no halogens or asbestos.

Contains no raw materials known to have an estrogenic effect.

The life cycle of Flexi-Coat Seal is over 25 years.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only.

Customers should satisfy themselves

to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control.

ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)