

Trade Name: ASTRO FLEXISEAL.

Flexible Intumescent Sheet for Door Ironmongery


Unaffected by moisture, humidity & atmospheric pollution.

Only 0.8mm thick - so minimal rebating required.

Very flexible and clean to work with.

Will bend without cracking.

Available with or without self adhesive backing

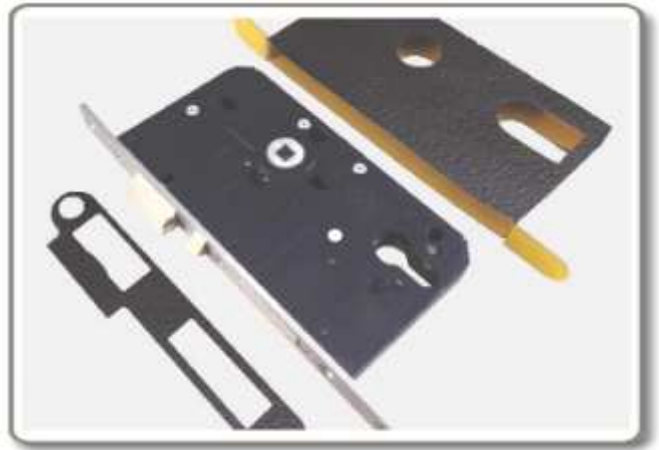

Description

All ironmongery installed on a fire door must be fitted without compromising the integrity of the complete fire door assembly. This is of particular importance where ironmongery is rebated into the doorset such as hinges, locks, latches and concealed door closers.

Astroflame Flexiseal is an ultra thin and flexible high performance intumescent sheet. At 0.8mm Astroflame Flexiseal offers high levels of expansion and insulation preventing heat transfer on ironmongery rebated into timber doorsets.

Astroflame Flexiseal is suitable for both 30 and 60 minute applications.



Flexiseal sheet material can be cut to suit all types of rebated door ironmongery.

Properties, Specification & Availability

Code	Description	Fire Rating	Size	Packaging
AFFLEXIH/PK	6 No. Hinge Pads	30/60	100 x 31mm	Poly Bagged
AFFLEXIH/300	300 No. Hinge Pads	30/60	100 x 31mm	Box
AFFLEXIHC/PK	6 No. Hinge Pads Radius Corners	30/60	100 x 31mm	Poly Bagged
AFFLEXIHC/300	300 No. Hinge Pads Radius Corners	30/60	100 x 31mm	Box
AFFLEXIDLK	Universal BS Deadlock Kit c/w strikeplate - Self Adhesive	30/60	-	Poly Bagged
AFFLEXISLK	Universal BS Sashlock Kit c/w strikeplate - Self Adhesive	30/60	-	Poly Bagged
AFFLEXIDINLK	Universal Din BS Sashlock Kit c/w strikeplate - Self Adhesive	30/60	-	Poly Bagged
AFFLEXIFBK	200mm Lever Action Flush Bolt Kit Radius Ends - Self Adhesive	30/60	-	Poly Bagged



To Order & Specify

Please quote- Quantity / Trade name / Product ref / Description:

Typical wording

10 / Flexiseal / AFFLEXIH/PK / Hinge Pads.

5 / Flexiseal / AFFLEXIHC/PK / Hinge Pads Radius Corners.

Fire Test or Assessment Reports

Astro Flexiseal has been extensively tested to the latest British and European standards as follows:

BS 476 part 22 : 1987 - 30 and 60 minute rating

BS EN 1634-1 : 2008 - 30 and 60 minute rating

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)