

Trade Name: ASTRO ISS PAINT

INTUMESCENT PAINT FOR STEEL & CAST IRON

COSHH Data

Installation Data

Product Images

Installation Video


Intumescent Paint for structural steel and cast iron

Conforms to BS476 Part 21: - Fire resistance for load bearing elements of structural steel

Rated for 30 or 60 minutes.

Available in wide range of finishes.

Brush, roller or airless spray application

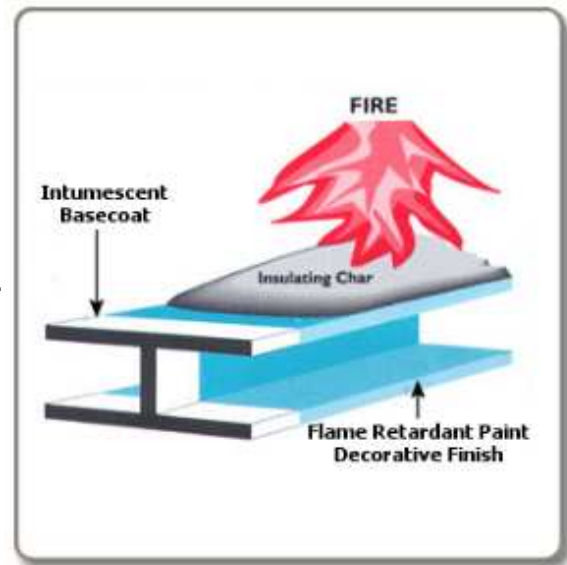

Description

ASTRO ISS Paint is an intumescent coating for steel, a thin decorative fireproof paint system providing fire resistance to structural steel and cast iron.

Heat from a fire triggers a catalytic reaction causing intumescence (expansion) of an insulating char layer up to 50 times the paint film thickness. This char keeps the steel below critical temperature to maintain the structural stability of the building.

Fire resistance of ½ hour and 1hour can be achieved with a single application of ASTRO ISS Paint.

Availability

A range of hard, high quality, weather resistant decorative finishes matches the decor, architectural or historic features of a building while helping to make it a safer structure.

Available in [BS4800](#), [RAL](#) and metallic colours and a non decorative finish for unexposed areas.

Eggshell..... BS4800 + RAL.
One-coat gloss..... BS4800 + RAL.
Metallic..... Steel, gunmetal, rust, silver, gold.
Non decorative..... N/A - For dry, hidden areas only.

ASTRO ISS Paint is available in 5 kilo and 20 kilo containers
ASTRO FR PAINT (flame retardant topcoat finish) is available in 2.5 and 5 Litre containers.

To Order & Specify

We are happy to provide specifications and quotations - please use our [structural steel specification form](#) to ensure we cover all aspects of your fire protection and decorative requirements in our quote. We accept any order size.

Prior to application the contractor should contact the Astroflame Technical Department (see above) to obtain a basecoat application schedule.

Fire Tests

Certificate of Supply upon request for each project for Insurance, Fire and Building Control Authority and Client Records.



Application

Steel and cast iron should be free from rust and millscale and primed with ASTRO HBP high build primer 75 microns DFT or other primer compatible with intumescent paints. Galvanized steel or Stainless Steel should be degreased and then primed with a suitable primer.

We recommend the use of airless spray equipment for large areas

Graco 5000 or 7500

Filter size 30 mesh

10mm hose with no whip end

Tip size : 317-319 (6" fan) - Narrow surfaces 417-419 (8" fan) - Broad surfaces

Cleaner: solvent or water depending on paint type.

Max. Relative Humidity **80%**.

Min. Temperature 6°C.

Min. Surface Temperature 3°C above dew point

Max Thickness per coat; brush 600 microns

Max Thickness per coat; spray 2000 microns (S)

Max Thickness per coat; spray 1400 microns (W)

The paint can also be applied by brush or roller.

Minimum drying times:	Brush / Roller	Spray
Surface Dry	2hrs	4hrs
Recoat	4hrs	10hrs
Overcoat with ASTRO FR decorative finish	10hrs	48hrs

Health and Safety

Observe all normal health and safety precautions for painting including ventilation, hygiene and masks and protective clothing as appropriate.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage.](#)