

Trade Name: ASTRO ITC PAINT

INTUMESCENT PAINT FOR TIMBER

[COSHH Data](#)

[Installation Data](#)

[Product Images](#)

[Installation Video](#)


Class 1 & Class 0 Intumescent Paint for Timber

BS476 Part 7: Class 1 surface spread of flame.

BS476 Part 6: Fire propagation Class 0

Available in a wide range of finishes.

Brush, roller or spray application.

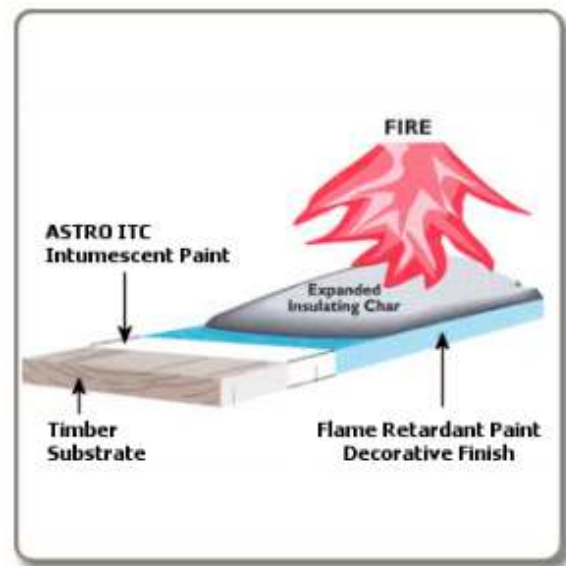

Description

Intumescent paint for bare or previously painted timber and timber derivative surfaces where surface spread of flame or fire propagation need to be controlled.

The paint contains intumescent compounds, intumescent paint resin binders and high opacity pigments.

When exposed to fire the paint expands to create a fire protective barrier, insulating the timber surfaces from heat and oxygen.

Availability

ASTRO ITC Paint is available in 5 kilo and 20 kilo containers

It can be overcoated with our [flame retardant paint](#) - available in [BS4800](#), [RAL](#) and metallic colours and a range of finishes.

To Order & Specify

We are happy to provide specifications and quotations - please use our [specification form](#) to ensure we cover all aspects of your fire protection and decorative requirements in our quote. We accept any order size.

Prior to application the contractor should contact the Astroflame Technical Department (see above) to obtain a basecoat application schedule.

Fire Tests

Certificate of Supply upon request for each project for Insurance, Fire and Building Control Authority and Client Records.



Application

For Class 1 and Class 0 apply 2 coats of ASTRO ITC by brush or roller or spray at 7 m sq per litre per coat

Health and Safety

Observe all normal health and safety precautions for painting including ventilation, hygiene and masks and protective clothing as appropriate.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

