


INTUMESCENT PAINT - Product Menu

(Steel) (Topcoat)
(Timber) (Walls)

INTUMESCENT PAINT FOR WALLS & CEILINGS

Trade Name: ASTRO IWC PAINT

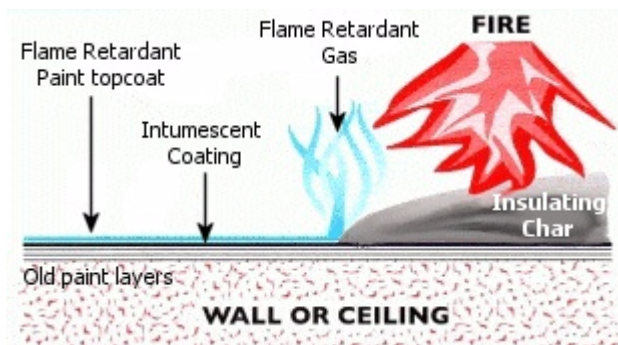

BS476 Part 7: Class 1 surface spread of flame.

BS476 Part 6: Fire propagation.

Designated Class 0 in accordance with U.K. Building Regulations.

Description

Astroflame IWC is an intumescent undercoat for application to previously painted plaster, Artex, board, brick and concrete walls and ceilings.

It is used to upgrade walls and ceilings coated with multi-layered paint films to Class 0.

Overcoating with Astroflame FP flame retardant paint insulates old paint films from fire, controlling the spread of flames along walls and ceilings.

Inherently non-combustible surfaces such as plaster-board and brick can become a potential fire hazard due to repeated redecoration with conventional paints.

In a fire thick layers of old paint tend to delaminate rapidly catching and spreading fire around a building. In extreme cases a lethal "flash-over" fireball effect is created. The resultant risk to life and property can be greatly reduced at minimum cost using a combination of Astroflame IWC paint, an insulating "intumescent" barrier coating, and Astroflame FP flame retardant paint.

When exposed to a fire Astroflame flame retardant paint releases a flame extinguishing gas which instantly protects the surface. Simultaneously heat activates Astroflame IWC intumescent coating underneath causing it to expand and create a fire protective barrier, insulating old paint films from heat and oxygen.

Availability

Astroflame IWC Paint is available in 5 kilo and 20 kilo containers.

For a decorative finish Astroflame FP fire proof topcoat is available in 2.5 litre and 5 litre containers. Please refer to separate ASTRO FR data sheet.

To Order & Specify

We are happy to provide specifications and quotations - please use our to ensure we cover all aspects of your fire protection and decorative requirements in our quote. We accept any order size.

Prior to application the contractor should contact the Astroflame Technical Department (see above) to obtain a basecoat application schedule.

Fire Tests



Certificate of Supply upon request for each project for Insurance, Fire and Building Control Authority and Client Records.

Application

Apply 1 coat Astroflame Wallcoat at 8M²/litre *plus* either:

1 coat Astroflame Flame Retardant Acrylic Matt (White))at 10 M²/ litre:
or

2 coats Flame Retardant Acrylic Eggshell at 10M²/litre per coat:
or

2 coats Flame Retardant Acrylic Matt (Colours) at 10M²/litre.

Max. Relative Humidity 75%.

Min. Temperature 6°C.

Min. Surface Temperature 3°C above dew point.. .

Health And Safety

Observe all normal health and safety precautions for painting including ventilation, hygiene and masks and protective clothing as appropriate.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email