

Trade Name: Astro TDW Thermal Defense Wrap

[COSHH Data](#)

[Installation Data](#)

[Product Images](#)

[Installation Video](#)

Fire resistant wrap for pipes and cables.

Fire resistance testing to EN 1366-3 EI 120.

Fire Classification to EN 13501-2.

Tested in block wall, concrete, masonry & plasterboard partition.

Tested in concrete floors.

Tested in large service openings.

Tested with metallic pipes, cables, cable bunches, cable trays and cable ladders.

Remains flexible between -10 to +160°C.

Continued flexibility without ageing.



Quick and easy to install.

Easy to wrap, shape and cut.

High level of insulation, high temperature stability.



Certifire 3rd Party Accreditation

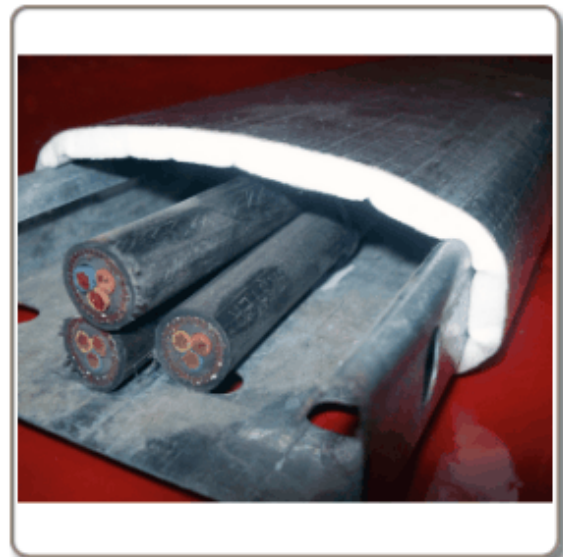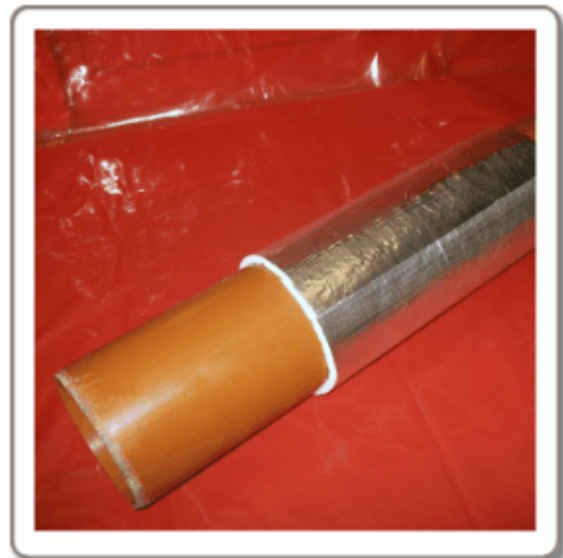

Description

Thermal Defense Wrap prevents the passage of fire and smoke between fire rated compartments where there is a service penetration.

It is an easy to use product designed to maintain necessary insulation on services and prevent temperature rise of service on the cold face.

The wrap remains flexible at normal temperatures to permit thermal and mechanical movement of the services without

causing cable to overheat and deteriorate. It causes no known adverse effects to plastic pipes, plastic cables, sheathing or metallic components.

Thermal Defense Wrap is based on ceramic technology with bio-soluble, vitreous fibres and flexible organic binders that will maintain compartmentalization for up to 2 hours.

Tested in concrete floors. Tested in large service openings.

Highly flexible and water resistant. Halogen free, resists fungi and vermin.

For installation a 300mm length is required on each side of the service.

Specification

Dimensions	6mm thickness
Sheet Size	300mm wide x 1000mm long x 6mm We can supply in different roll sizes or cut to size
Density	180Kg/m ³ - 250Kg/m ³
Colour	White & Silver
Alufoil Thickness	0.25mm Nominal
Fire Resistance	2 hours – EN1366:3 2009
Fire Classification	EN13501-2
Suitability	Cables, Metallic Pipes, Cable Trays, Cable Ladders
Use	Can be used around Armaflex type products
Thermal Conductivity (U Value)	N/A
Acoustic Performance	N/A
Shelf Life	36 months from date of manufacture.

Installation Notes

Use rubber gloves and protection to avoid skin and eye contact.

Cut strip to suit service circumference.

Wrap around the service.

Apply Resin Extreme Glue or Foil tape to fix to service.

Maintain record of installation.

Thermal Defense Wrap is not affected by an outdoor environment once installed and sealed. However, for long term storage and ease of installation it is recommended that it should be stored indoors, ideally in dry conditions. Ideal storage temperature between -5°C and +25°C.

Availability & Packing

Name	Dimensions	Product Code
Astro TDW	300mm wide x 1200mm long x 6mm	AFTDW
Astro TDW	Customer Specified	---

Please quote - Quantity / Trade Name / Product Ref.

Typical example:-

10 / Astro Thermal Defense Wrap / AFTDW

Fire Test or Assessment Reports

Fire resistance testing to EN 1366-3 EI 120.

Fire Classification to EN 13501-2.

Certifire 3rd Party Accreditation

Environmental Impact

Low VOC (air quality).

No Power Tools required for installation (no energy source required).

Dust free.

Low Ozone Depletion Potential (ODP).

Low Global Warming Potential (GWP).

No water pollution.

Smoke and Air Tightness.

Noise Reduction.

Thermal Insulation.

Recycling of Packaging.

Avoidance of Air Filtration.

Does not emit halogenated by-products.

Contains no raw materials known to have an estrogenic effect.

The life cycle of Thermal Defense Wrap is over 25 years.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only.

Customers should satisfy themselves

to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control.

ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

Astroflame (Fire Seals) Ltd. Intumescent House
Unit 8, The IO Centre, Stephenson Road, Segensworth
FAREHAM, ENGLAND PO15 5RU

tel 0800 023 2482
(01329 844500)

fax 0800 023 2483
(01329 844600)

intl
tel +44 1329 844500

fax +44 1329 844600

email sales@astroflame.com

[Homepage](#)