


Product Data Sheet

Astro Cavity Fire Barrier Roll

Revision 4 - January 2019

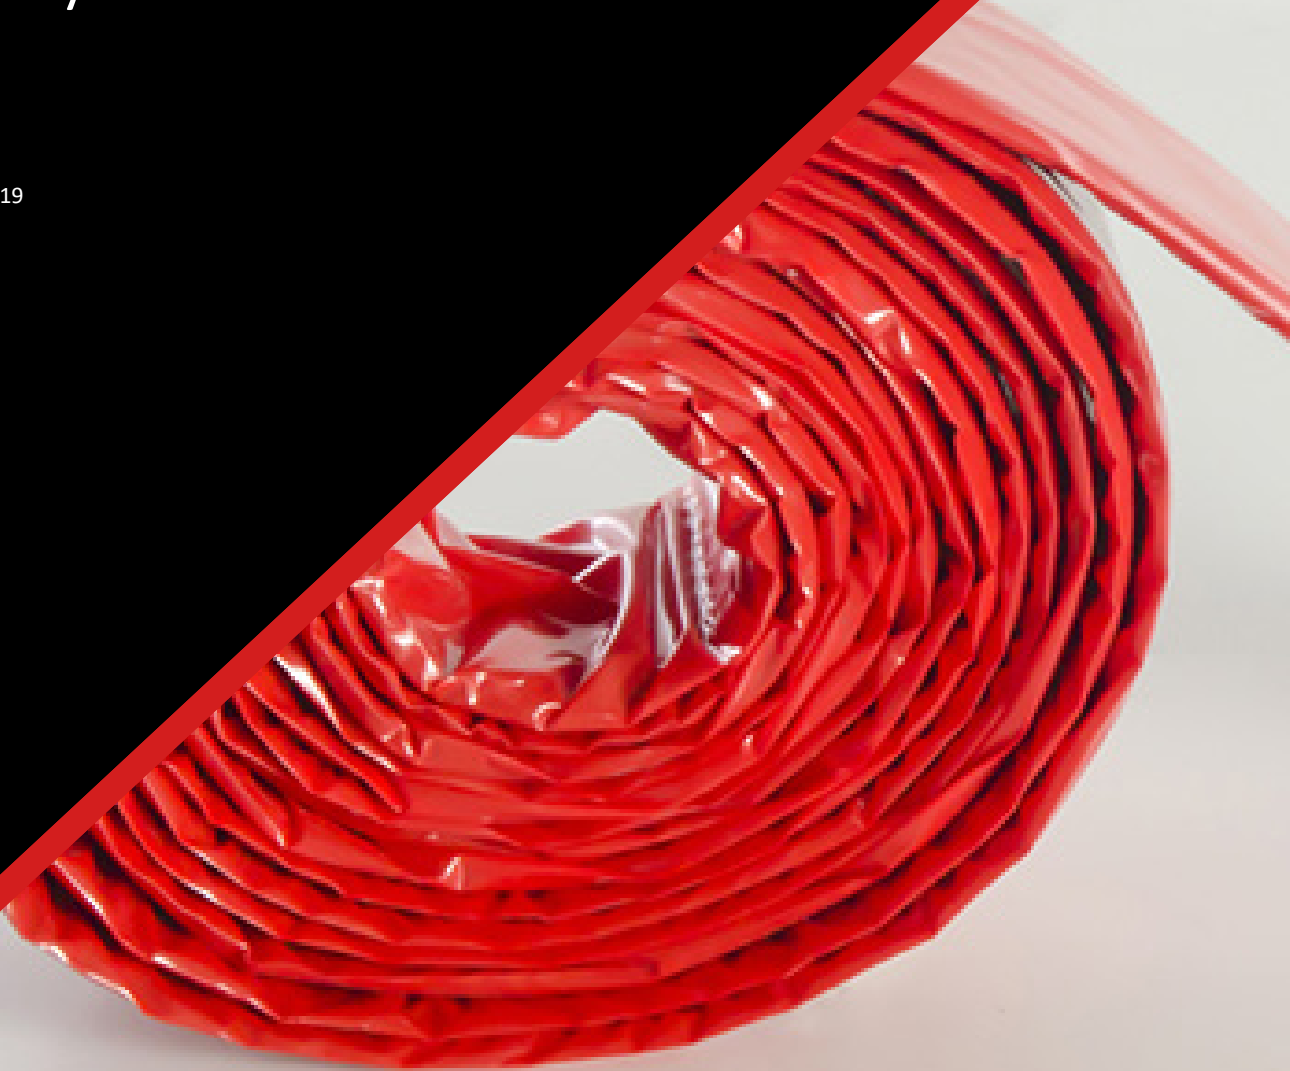

Astro Cavity Fire Barrier Roll

Cavity Fire Barrier Roll

- Tested to BS 476 Part 20.
- 30 Minutes Fire Rating.
- For cavities up to a nominal 50mm.
- Suitable for timber frame & masonry cavities.
- Prevents thermal & moisture bridging.
- Reduces the need for unsightly ventilation and drainage apertures.
- Low Profile Design.
- Prevents pushing out of bricks.
- Compact Roll.



Product Description

Cavities are created in many wall constructions to aid thermal insulation performance and to provide a moisture barrier. Such constructions are common in residential, public and commercial buildings.

Completely closing the cavity, for example with solid cavity barriers, can detract from its performance and can result in both thermal and moisture bridging and potential structural damage.

These wall cavities can form unrestricted chimneys which, if left unprotected, can allow fire to spread both vertically and horizontally around a building.

Cavities are subject to Building Regulations and most should be fitted with fire barriers to prevent the spread of fire via the open cavity.

To combat this Astroflame as part of its continuing development of passive fire protection solutions has developed a Cavity Fire Barrier On a Roll.

NOTE: Only suitable for use behind brickwork/blockwork external walls. See Ventilated Fire Barriers for compatible fire barriers with alternative wall systems.

Product Availability

Available in 6.3 metre length.

| Product Code | Product Description | Size |
|--------------|--------------------------------|-------------|
| AFCFBR75 | Astro Cavity Barrier on a Roll | 75x4x6300mm |

To Order & Specify

Please contact us and quote the following information - Quantity / Product Code / Product Description / Size
Typical example:- 10 / AFCFBR75 / Astro Cavity Barrier on a Roll / 75x4x6300mm

>> Tel: [01329 844 500](tel:01329844500) or >> Email: sales@astroflame.com

Installation

Please see installation sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

Health and Safety

Please see (SDS) Safety Data sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.