


Product Data Sheet

Astro FR Door Viewer

Revision 6 - 5th March 2021

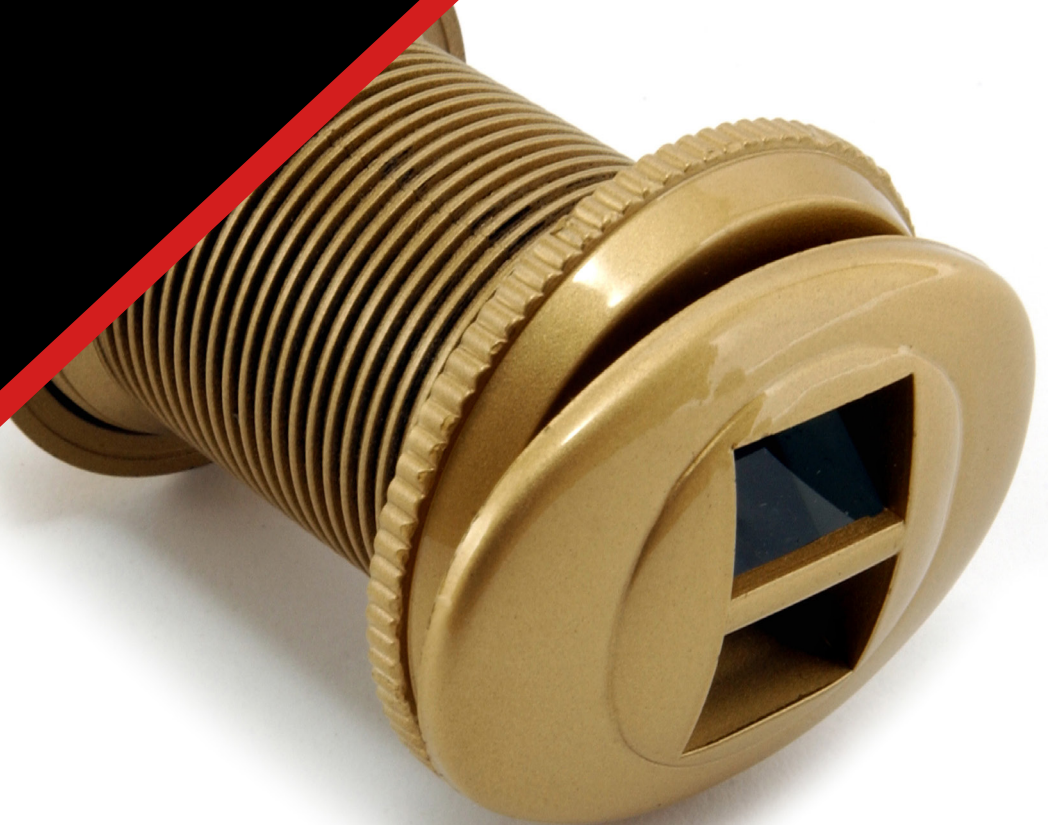

Astro HS Door Viewer

Fire Rated, High Security, Door Viewer

- Up to 60 minutes Fire Rated for Timber Fire Doors.
- Up to 30 minutes Fire Rated for Composite Doors.
- Suits 35mm - 62mm thickness doors.
- Designed for people with slight difficulties, the elderly and wheelchair users.
- Prism system permits viewer to be up to 2 metres away from the door.
- Gold or Silver Finish in plastic.



Product Description

A door viewer with extra security features and designed for a wider range of users than standard door viewers.


The special prism optics built into this secure door viewer allow the viewer to be stood well back from the door and provide other special features:

Whoever is on the other side of the door can not see inside / view movement

The person viewing can be up to 2 metres back from the door and still see who is outside.

High or Low viewing - the viewer can be standing or seated. The lower viewing option is well suited to wheelchair users or children.

Fire protection is by an intumescent strip, rated for up to 60 minutes fire resistance on timber fire doors and up to 30 minutes fire rated for composite doors.

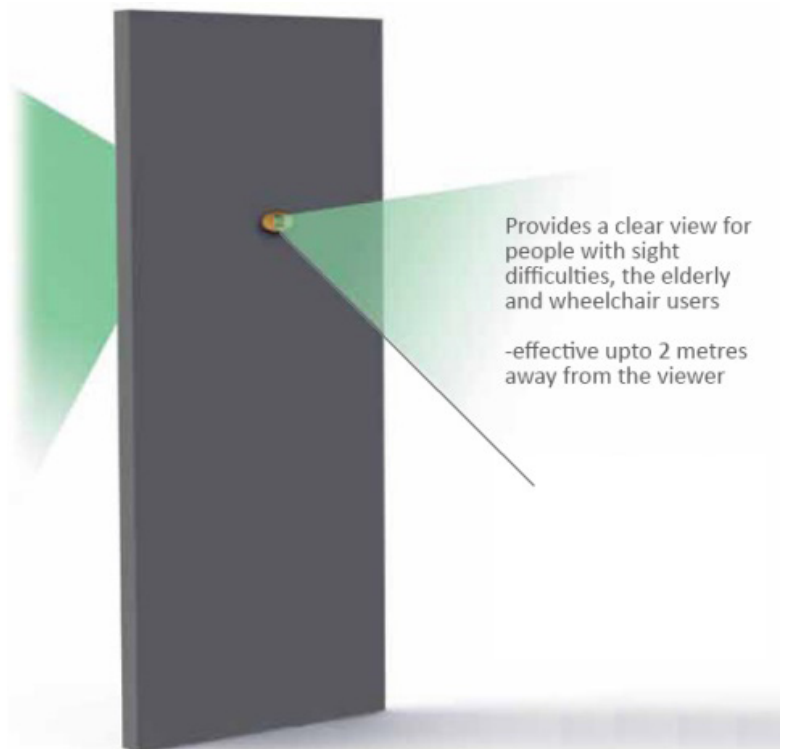

Product Availability

Product Code	Product Description	Colour
AFDV38G	Astro HS Door Viewer	Gold
AFDV38S	Astro HS Door Viewer	Silver

To Order & Specify

Please contact us and quote the following information - Quantity / Product Code / Product Description / Colour
Typical example:- 6 / AFDV38G / Astro HS Door Viewer / Gold

>> Tel: [01329 844 500](tel:01329844500) or >> Email: sales@astroflame.com

Installation

We have technical representatives who provide assistance in the selection and specification of the products on this site and should be consulted for exact installation and product suitability. Ensure an early engagement with ourselves, designers, main contractor and specialist installers before any installation. Other trades and/or manufacturers may need to be consulted. For in-depth information, specification and technical advice please call our Head Office on tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

Maintenance

All interested parties, designer, specifier, main contractor and specialist installers should provide access to allow the fire stopping seals to be regularly inspected and maintained, as well as records kept of such maintenance at minimum periods of 12 months, as required by the Regulatory Reform Order, and repaired if necessary. Reference should be made to ASFP TGD 17 – Code of Practice for the Installation and Inspection of Fire Stopping.

Competency

It is vital that those entrusted to design or install a fire stopping product have the necessary levels of competence to undertake the task professionally and thoroughly. The level of competency required will be commensurate with the expected complexity of the building. All designers must eliminate, reduce or control foreseeable risks that may arise during installation, construction or maintenance when preparing or modifying designs. Clients should ensure that the principal designer and principal contractor carry out their duties under CDM regulations. The ASFP foundation course in passive fire protection provides essential knowledge as part of demonstrating competency and understanding in this key fire protection specialism.

Additional Notes

Each fire door and hardware component will have its own test evidence. It is the responsibility of the purchaser to ensure that the product is fully compliant with the relevant test evidence, if in doubt please contact the technical team on: tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

Health and Safety

Please see (SDS) Safety Data sheet - This can be requested from our sales team T: [01329 844 500](tel:01329844500)
or E: sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME (FIRE SEALS) LTD has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROFLAME (FIRE SEALS) LTD, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 844500 or email sales@astroflame.com and we will contact you.