


# Product Data Sheet

## Framevent Hi-Flow Ventilators

Revision 1 - 17th March 2023

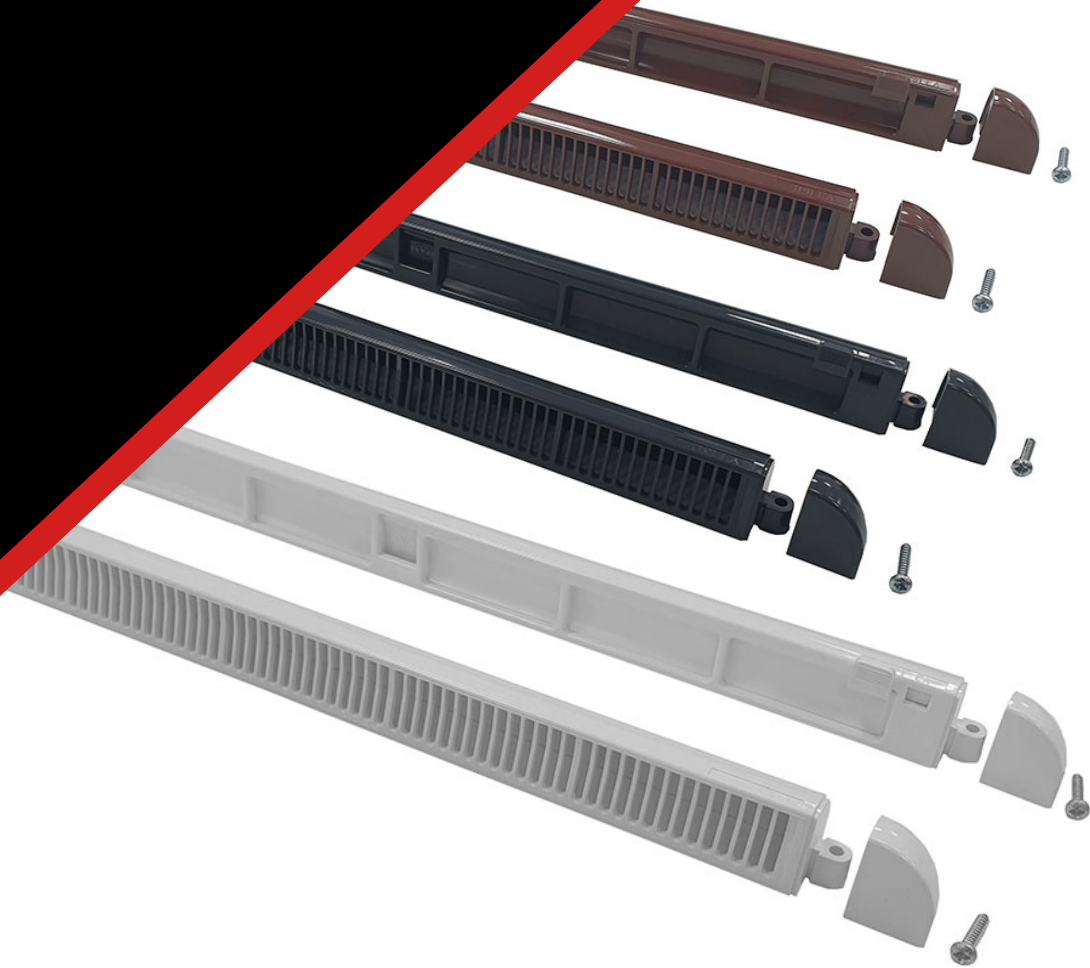


## Framevent Hi-Flow Ventilators

### Trickle Vent

- A smooth, rounded design.
- Snap on, quick fit ends.
- Positive open & close action.
- Integral flyscreen in external hood.
- Suitable for PVCu, timber & aluminium windows.
- Tested in accordance with BS EN 1026:2016 & BS EN 1027: 2016 Weather performance.
- Rod control available- for full compliance with Approved Document K 2013.
- Can be fitted to give updraught or down-draught.
- Various colours to choose from.
- Joiner pieces available.



*Various colours*

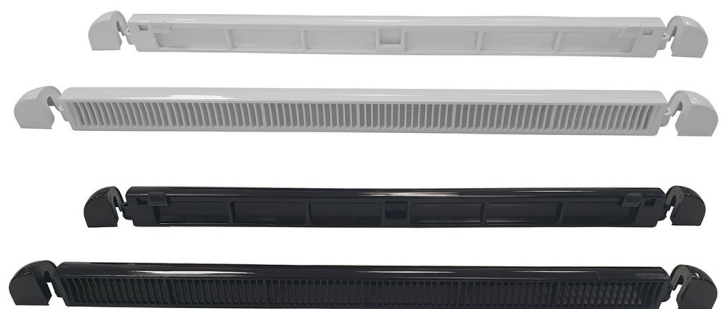

*Trickle Vents Framevent Hi-Flow Ventilators 415mm*

#### Product Description

Manufactured in the highest quality U.V Stabilised PVCu, the Framevent Hi-Flow have been specifically designed to make it easy to achieve the requirements of Approved Document F 2021 whilst still maintaining the smooth, rounded aesthetic synonymous of the Framevent range. The Framevent Hi-Flow achieves 4,191mm<sup>2</sup> EA on a length of only 415mm.



#### Fixing Instructions

- Route out the Frame with the correct slot size & configuration for the model to be fitted
- Place unit centrally over the slots.
- Fix unit in place by using screws provided.
- Screw hole centres are 20mm in from each end (40mm off the overall length).

## Performance

- Independently tested to BS EN 13141-1:2019.
- Water tightness of 400pa.
- Independently acoustically tested in accordance with BS EN 20140-10:2016, ISO 140-10:2010.

## Maintenance

- The Framevent can be cleaned using a damp cloth. The external hood should be brushed lightly to remove dust from the flyscreen area.
- \*Airflow rates quoted are for when fitted in accordance with manufacturer's instructions. We recommend silicone sealing vents for best results\*.

## Product Information

- Available in White, Brown, Black and Anthracite Grey measurement of Framevent Hi-Flow seen below:
- 415mm Length x 13mm wide. Equivalent area as per BS 13141-1:2019 – 4191mm<sup>2</sup>.
- Slot Size – 365x13mm.

## Product Availability

Product Code	Product Description	Colour	Size
ADVVHF415W	Framevent Hi-Flow	White	415mm
ADVVHF415BLK	Framevent Hi-Flow	Black	415mm
ADVVHF415B	Framevent Hi-Flow	Brown	415mm
ADVVHF415ANT	Framevent Hi-Flow	Anthracite Grey	415mm

## To Order & Specify

Please contact us and quote the following information - Quantity / Product Description / Product Code / Colour / Size  
Typical wording - 15 | Framevent Hi-Flow | ADVVHF415W | White | 415mm

>> Tel: [01329 844 500](tel:01329844500) or >> Email: [sales@astroflame.com](mailto:sales@astroflame.com)

## Installation

For further information on installation requirements please contact the technical team on: tel [01329 844 500](tel:01329844500)  
or email [sales@astroflame.com](mailto:sales@astroflame.com)

## Health and Safety

The product does not present any known health hazards during or after installation. Normal good industrial and personal hygiene practices should be observed.

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME FIRESEALS LTD has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROflame (Fireseals) Ltd, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.